





INSTALL IT. TRUST IT.

AF/ArmaFlex Evo

Discover the new generation in elastomeric insulation. AF/ArmaFlex Evo. The safest AF/ArmaFlex ever.

- // Fire Safety – B/B(L)-s2,d0
- // Antimicrobial Protection – Microban
- // Engineered Wall Thicknesses – Maximum Safety
- // System reliability – One-Stop Solution
- // Extended warranty – 10 Years
- // Brand new – ArmaFlex 525 Adhesive

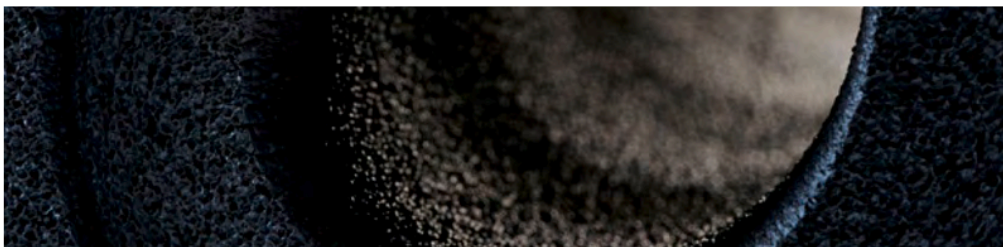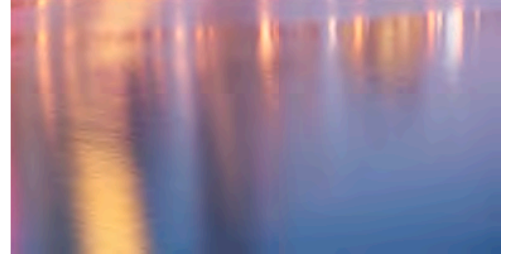

 **armacell**[®]
ArmaFlex[®]

INSTALL IT. TRUST IT.

AF/ArmaFlex® Evo

THE SAFEST AF/ARMAFLEX EVER.

History meeting the future through generations. That's what AF/ArmaFlex stands for. For more than 40 years. We strive for perfection so you can benefit from the best ArmaFlex experience. Now it's time to discover the new generation in elastomeric insulation.

Today, in its 8th product generation, we present a new AF/ArmaFlex technology that combines excellent condensation control and energy efficiency with advanced fire safety. The new B/B_L-s2,d0 product provides highest insulation reliability and contributes to the overall safety in buildings.



// Fire safety

At Armacell, safety comes first and maximum reliability is crucial. AF/ArmaFlex Evo increases the fire safety in buildings. By mitigating the fire and smoke risk, it improves visibility and respiration, thus extending the time for evacuating a building safely in the event of a fire.

// Antimicrobial protection

AF/ArmaFlex Evo is equipped with Microban®. These antimicrobial additives provide 'proactive' protection against harmful bacteria, mould and mildew. Armacell is the only manufacturer of flexible technical insulation materials to offer built-in antimicrobial protection.


// Engineered wall thicknesses

The engineered wall thicknesses of AF/ArmaFlex Evo tubes guarantee reliable condensation control for different pipe sizes under defined design conditions. This makes calculations much easier for specifiers and provides maximum reliability to prevent condensation and energy losses.

Udo Dohlen

Owner and managing director of Dohlen Isoliertechnik, Stolberg (Germany)

"AF/ArmaFlex isn't just any black tube or sheet. When we insulate our customers' mechanical equipment we make sure to use the best product in the market: AF/ArmaFlex. An investment that pays off. For us and for our customers. Now we can help to make people's homes even safer. AF/ArmaFlex Evo releases 50 percent less smoke in case of fire."

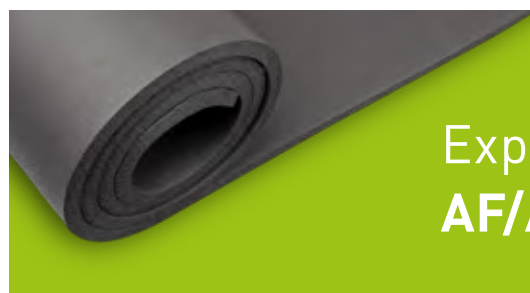

B/B_L-s2,d0

Experience AF/ArmaFlex Evo

The evolution of an innovation

When tradition meets the future, new products and technologies evolve. AF/ArmaFlex is our heritage product. The highly flexible insulation material with an in-built vapour barrier revolutionised the insulation industry. Today, we provide a complete range of solutions based on this innovation.

Armacell has developed the new ArmaFlex 525 adhesive to be used with AF/ArmaFlex Evo.



// System reliability

AF/ArmaFlex Evo is more than a black tube or sheet. Armacell provides solutions where individual components fit flawlessly together and are tested as a system. ArmaFix AF pipehangers, our ArmaFlex Protect passive fire protection solution, flexible cladded Arma-Chek® 2-in-1 products and ArmaFlex adhesives complement and strengthen the system to guarantee long-term functionality.

// Extended warranty

To ensure AF/ArmaFlex products are installed professionally we developed a unique concept: trained ArmaFlex installation partners can be certified by Armacell and receive an extended warranty of up to 10 years on AF/ArmaFlex products for specific projects. In many European countries this certification has established itself as a seal of quality.

TECHNICAL DATA - AF/ARMAFLEX EVO

Brief description	Flexible elastomeric foam with improved fire-retardant properties, low smoke generation, closed-cell insulation material structure and built-in Microban antimicrobial protection. For use in HVAC, refrigeration and process equipment application.
Material type	Elastomeric foam based on synthetic rubber. Factory-made flexible elastomeric foam (FEF), according to EN 14304.
Additional material information	Self-adhesive coating: pressure-sensitive adhesive coating on modified acrylate basis with mesh structure, covered with polyethylene foil. Traces of silicon can be found on the protection paper/foil used to protect self-adhesive closures.
Product colour range	Black
Special features	This product is infused with Microban antimicrobial protection to provide additional assurance against mould and mildew growth in the insulation.
Applications	Insulation/protection for pipes, air ducts, vessels (including elbows, fittings, flanges, etc.) of air-conditioning/refrigeration and process equipment to prevent condensation and save energy.
Installation	Please refer to the ArmaFlex application manual for advice.
Declaration of performance	Declaration of Performance in accordance with Article 7(3) of Regulation [EU] No 305/2011 is available at www.armacell.com/DoP .

Property	Value / Assessment		Standard / Test method
Temperature range			
Service temperature	Min. °C ¹	Max. °C ²	EN 14706, EN 14707, EN 14304
	-50	110	
Thermal conductivity			
Declared thermal conductivity	Øm	0 °C	EN ISO 13787, EN ISO 8497
	$\lambda d \leq [W/(m \cdot K)]$	0,033	
	Range	Tubes (AF-EVO-1 - AF-EVO-4)	
	Formula	$\lambda d = [33 + 0,1 \cdot \varnothing m + 0,0008 \cdot \varnothing m^2]/1000$	
Declared thermal conductivity	Øm	0 °C	EN ISO 13787, EN 12667, EN ISO 8497
	$\lambda d \leq [W/(m \cdot K)]$	0,036	
	Range	Tubes (AF-EVO-5 - AF-EVO-6) as well as sheets and tapes (3 - 32 mm)	
	Formula	$\lambda d = [36 + 0,1 \cdot \varnothing m + 0,0008 \cdot \varnothing m^2]/1000$	
Declared thermal conductivity	Øm	0 °C	EN ISO 13787, EN 12667
	$\lambda d \leq [W/(m \cdot K)]$	0,037	
	Range	Sheets (> 32 mm - 50 mm)	
	Formula	$\lambda d = [37 + 0,1 \cdot \varnothing m + 0,0008 \cdot \varnothing m^2]/1000$	
Fire Performance and Approvals			
Reaction to fire	Tubes: B(L)-s2, d0 Sheets, Tapes: B-s2,d0 Tubes/sheets with ArmaFix AF: B(L)-s2,d0 Class 0		EN 13501-1, EN ISO 11925-2, EN 13823, BS 476 Part 6
Surface flammability ³	low-flammable - 2010 FTP-Code (MED 96/98/EC, Module D)		IMO 2010 FTP Code, Part 5
FM approved	4924 - Pipe and duct insulation		UBC26-3
Passive fire protection			
Fire resistance of elements of construction	EI 30 - EI 90		EN 13501-2, EN 1366-3
UL standards			
UL 94 5VA ⁴	Pass (tubes and sheets \geq 3.0 mm)		UL 94, IEC 60695-11-10, UL 746B, UL 746 A

Property	Value / Assessment	Standard / Test method
Fire performance		
Practical fire behaviour	Self-extinguishing, does not drip, does not spread flames, low smoke development	
Resistance to water vapour		
Water vapour diffusion resistance factor	Tubes (AF-Evo-1 to AF-Evo-4): $\mu \geq 10.000$ Tubes (AF-Evo-5 to AF-Evo-6); Sheets (3 -50mm) and Tape: $\mu \geq 7.000$	EN 12086, EN 13469
Physical attributes		
Dimensions and tolerances	in accordance with EN 14304, table 1	EN 822, EN 823, EN 13467
Weather and UV resistance		
UV resistance ⁵	Protection against UV-radiation is necessary (see Technical Bulletin no. 142).	
Health and environment		
Antimicrobial behaviour	In-built Microban active antimicrobial protection: No fungal growth observed	EN ISO 846, VDI 6022
Environmental Product Declaration (EPD)	Type III Environmental Product Declaration (EPD): Declaration number "EPD-ARM-20220038-IBB1-EN", Institut Bauen und Umwelt e.V. (IBU)	ISO 14025, EN 15804+A2
Other technical features		
Adhesion and sealing	ArmaFlex 525 is the certified adhesive for this product. However, ArmaFlex 520 adhesive can potentially be used for tubes.	
Shelf life	Self-adhesive tapes, self-adhesive sheets, self-adhesive tubes: 1 year	
Storage	Can be stored in dry, clean rooms at normal relative humidity (50% to 70%) and ambient temperature (0 °C – 35 °C).	

¹For use in temperatures beyond the maximum and minimum service temperature range indicated in the technical data table, please contact our Customer Service Centre.

²+85 °C, for products with a self-adhesive layer.

³According to IMO 2010 FTP Code annex 2, clause 2.2 a fire technical test for smoke density and toxicity is not necessary.

⁴Only for products without self-adhesive-layer.

⁵If ArmaFlex is used outdoors or in applications under UV radiation, it should be protected with a covering such as ArmaClad Arma-Chek within 3 days of installation.

Tube – standard. Black. Tubes packed in cartons.

AF-EVO-1

Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Insulation thickness [mm]	EAN	Content [metric]
6	AF-EVO-1-006	7	8,5	7	7612207480597	360 m
8	AF-EVO-1-008	9	10,5	7	7612207480610	310 m
10	AF-EVO-1-010	11	12,5	7,5	7612207480634	300 m
12	AF-EVO-1-012	13	14,5	7,5	7612207480658	234 m
15	AF-EVO-1-015	16	17,5	8	7612207480566	192 m
18	AF-EVO-1-018	19	20,5	8	7612207480511	140 m
22	AF-EVO-1-022	23	24,5	8,5	7612207480542	132 m
25	AF-EVO-1-025	26	27,5	8,5	7612207480856	108 m
28	AF-EVO-1-028	29	30,5	8,5	7612207480863	100 m
30	AF-EVO-1-030	31	33	9	7612207480726	96 m
32	AF-EVO-1-032	33	35	9	7612207495003	84 m
35	AF-EVO-1-035	36	38	9	7612207480740	76 m
38	AF-EVO-1-038	39	41	9	7612207480979	70 m
42	AF-EVO-1-042	43,5	45,5	9	7612207480986	60 m
45	AF-EVO-1-045	46	47,5	9	7612207495010	56 m
48	AF-EVO-1-048	49,5	51,5	9	7612207481006	50 m
54	AF-EVO-1-054	55	57	9	7612207481044	48 m
57	AF-EVO-1-057	58	60	9	7612207495027	40 m
60	AF-EVO-1-060	61,5	63,5	9	7612207481075	36 m
64	AF-EVO-1-064	65	67,5	9,5	7612207481099	32 m
70	AF-EVO-1-070	71	73,5	9,5	7612207480702	32 m
76	AF-EVO-1-076	77	79,5	9,5	7612207480719	28 m
80	AF-EVO-1-080	81	84	9,5	7612207480764	24 m
89	AF-EVO-1-089	90,5	93	9,5	7612207480801	22 m
102	AF-EVO-1-102	105	108	9,5	7612207480825	16 m
108	AF-EVO-1-108	109,5	113	9,5	7612207480832	16 m
110	AF-EVO-1-110	112	116	9,5	7612207480870	16 m
114	AF-EVO-1-114	116	120	9,5	7612207480887	16 m
125	AF-EVO-1-125	127	131	9,5	7612207494990	12 m
140	AF-EVO-1-140	142	146	10	7612207480894	12 m
160	AF-EVO-1-160	162	166	10	7612207495034	8 m

Other information

Thickness tolerance

AF-EVO-1, AF-EVO-2: ± 1.0 mm
 AF-EVO-3, AF-EVO-4: ± 1.5 mm
 AF-EVO-5: ± 2.5mm
 AF-EVO-6: ± 3.0mm

Length tolerance

± 1.5 %

Tube – standard. Black. Tubes packed in cartons.

AF-EVO-2

Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Insulation thickness [mm]	EAN	Content [metric]
6	AF-EVO-2-006	7	8,5	9,5	7612207480900	288 m

Tube – standard. Black. Tubes packed in cartons.

AF-EVO-2

Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Insulation thickness [mm]	EAN	Content [metric]
8	AF-EVO-2-008	9	10,5	10	7612207480924	240 m
10	AF-EVO-2-010	11	12,5	11	7612207480948	170 m
12	AF-EVO-2-012	13	14,5	11	7612207481013	168 m
15	AF-EVO-2-015	16	17,5	11,5	7612207480788	130 m
18	AF-EVO-2-018	19	20,5	11,5	7612207481488	120 m
22	AF-EVO-2-022	23	24,5	12	7612207481532	100 m
25	AF-EVO-2-025	26	27,5	12,5	7612207481433	88 m
28	AF-EVO-2-028	29	30,5	12,5	7612207481464	84 m
30	AF-EVO-2-030	31	33	12,5	7612207481365	72 m
32	AF-EVO-2-032	33	35	13	7612207495041	64 m
35	AF-EVO-2-035	36	38	13	7612207481389	62 m
40	AF-EVO-2-040	41	42,5	13,5	7612207481426	44 m
42	AF-EVO-2-042	42,5	45,5	13,5	7612207481440	48 m
48	AF-EVO-2-048	49,5	51,5	13,5	7612207481471	44 m
50	AF-EVO-2-050	51	52,5	13,5	7612207495058	32 m
54	AF-EVO-2-054	55	57	13,5	7612207481525	36 m
57	AF-EVO-2-057	58	60	14	7612207495065	34 m
60	AF-EVO-2-060	61,5	63,5	14	7612207482324	32 m
64	AF-EVO-2-064	65	67,5	14	7612207482454	28 m
64	AF-EVO-2-064	65	67,5	14	7612207495294	30 m
70	AF-EVO-2-070	71	73,5	14	7612207481839	28 m
76	AF-EVO-2-076	77	79,5	14	7612207481976	28 m
80	AF-EVO-2-080	81	84	14,5	7612207481990	24 m
89	AF-EVO-2-089	90,5	93	14,5	7612207482072	22 m
102	AF-EVO-2-102	105	108	14,5	7612207482096	18 m
108	AF-EVO-2-108	109,5	113	14,5	7612207482164	18 m
110	AF-EVO-2-110	112	116	15	7612207495072	16 m
114	AF-EVO-2-114	116	120	15	7612207482171	16 m
125	AF-EVO-2-125	127	131	15	7612207482232	12 m
133	AF-EVO-2-133	135	139	15,5	7612207482249	12 m
140	AF-EVO-2-140	142	146	15,5	7612207482256	8 m
160	AF-EVO-2-160	162	166	16	7612207482331	8 m

Other information

Thickness tolerance

AF-EVO-1, AF-EVO-2: ± 1.0 mm
 AF-EVO-3, AF-EVO-4: ± 1.5 mm
 AF-EVO-5: ± 2.5 mm
 AF-EVO-6: ± 3.0 mm

Length tolerance

± 1.5 %

Tube – standard. Black. Tubes packed in cartons.

AF-EVO-3

Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Insulation thickness [mm]	EAN	Content [metric]
10	AF-EVO-3-010	11	12,5	12,5	7612207482348	156 m
12	AF-EVO-3-012	13	14,5	13	7612207482355	144 m
15	AF-EVO-3-015	16	17,5	14	7612207482362	108 m
18	AF-EVO-3-018	19	20,5	14	7612207482461	96 m
22	AF-EVO-3-022	23	24,5	14,5	7612207482485	84 m
28	AF-EVO-3-028	29	30,5	15,5	7612207482508	64 m
35	AF-EVO-3-035	36	38	16	7612207482546	46 m
42	AF-EVO-3-042	43,5	45,5	16,5	7612207482560	40 m
48	AF-EVO-3-048	49,5	51,5	16,5	7612207482621	32 m
54	AF-EVO-3-054	55	57	17	7612207482676	28 m
60	AF-EVO-3-060	61,5	63,5	17	7612207482706	24 m
64	AF-EVO-3-064	65	67,5	17	7612207495089	20 m
70	AF-EVO-3-070	71	73,5	17,5	7612207495096	18 m
76	AF-EVO-3-076	77	79,5	17,5	7612207482720	16 m
89	AF-EVO-3-089	90,5	93	18	7612207482744	16 m
108	AF-EVO-3-108	109,5	113	18	7612207482768	12 m
110	AF-EVO-3-110	112	116	18	7612207495102	12 m
114	AF-EVO-3-114	116	120	18,5	7612207482775	12 m
125	AF-EVO-3-125	127	131	18,5	7612207495119	12 m
133	AF-EVO-3-133	135	139	18,5	7612207482782	8 m
140	AF-EVO-3-140	162	166	19	7612207495126	8 m
160	AF-EVO-3-160	162	166	19	7612207482829	6 m

Other information

Thickness tolerance

AF-EVO-1, AF-EVO-2: ± 1.0 mm
 AF-EVO-3, AF-EVO-4: ± 1.5 mm
 AF-EVO-5: ± 2.5 mm
 AF-EVO-6: ± 3.0 mm

Length tolerance

± 1.5 %

Tube – standard. Black. Tubes packed in cartons.

AF-EVO-4

Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Insulation thickness [mm]	EAN	Content [metric]
6	AF-EVO-4-006	7	8,5	15,5	7612207492897	120 m
10	AF-EVO-4-010	11	12,5	15,5	7612207482881	110 m
12	AF-EVO-4-012	13	14,5	16	7612207482898	100 m
15	AF-EVO-4-015	16	17,5	17	7612207481617	88 m
18	AF-EVO-4-018	19	20,5	17,5	7612207481631	70 m
22	AF-EVO-4-022	23	24,5	18	7612207481655	60 m
25	AF-EVO-4-025	26	27,5	18,5	7612207481730	56 m
28	AF-EVO-4-028	29	30,5	19	7612207481747	48 m
30	AF-EVO-4-030	31	33	19	7612207481761	40 m
32	AF-EVO-4-032	33	35	19,5	7612207495133	40 m

Tube – standard. Black. Tubes packed in cartons.

AF-EVO-4

Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Insulation thickness [mm]	EAN	Content [metric]
35	AF-EVO-4-035	36	38	19,5	7612207481846	36 m
40	AF-EVO-4-040	41	42,5	20,5	7612207495140	32 m
42	AF-EVO-4-042	43,5	45,5	20,5	7612207481860	32 m
45	AF-EVO-4-045	46	47,5	20,5	7612207495157	28 m
48	AF-EVO-4-048	49,5	51,5	21	7612207481884	24 m
50	AF-EVO-4-050	51	52,5	21	7612207495164	24 m
54	AF-EVO-4-054	55	57	21	7612207482010	24 m
57	AF-EVO-4-057	58	60	21,5	7612207501841	20 m
60	AF-EVO-4-060	61,5	63,5	21,5	7612207482034	20 m
64	AF-EVO-4-064	65	67,5	21,5	7612207482102	18 m
70	AF-EVO-4-070	71	73,5	22	7612207482188	16 m
76	AF-EVO-4-076	77	79,5	22	7612207482201	16 m
80	AF-EVO-4-080	81	84	22,5	7612207482270	16 m
89	AF-EVO-4-089	90,5	93	22,5	7612207482386	12 m
102	AF-EVO-4-102	105	108	23	7612207482409	10 m
108	AF-EVO-4-108	109,5	113	23	7612207482416	10 m
110	AF-EVO-4-110	112	116	23	7612207495171	10 m
114	AF-EVO-4-114	116	120	23,5	7612207482515	10 m
125	AF-EVO-4-125	127	131	23,5	7612207482522	8 m
133	AF-EVO-4-133	135	139	24	7612207482577	6 m
140	AF-EVO-4-140	142	146	24,5	7612207482584	6 m
160	AF-EVO-4-160	162	166	25	7612207482591	6 m
168	AF-EVO-4-168	170	174	25	7612207482607	4 m

Other information

Thickness tolerance
 AF-EVO-1, AF-EVO-2: ± 1.0 mm
 AF-EVO-3, AF-EVO-4: ± 1.5 mm
 AF-EVO-5: ± 2.5 mm
 AF-EVO-6: ± 3.0 mm

Length tolerance
 ± 1.5 %

Tube – standard. Black. Tubes packed in cartons.

AF-EVO-5

Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Insulation thickness [mm]	EAN	Content [metric]
18	AF-EVO-5-018	19	20,5	25	7612207482638	42 m
22	AF-EVO-5-022	23	24,5	25	7612207482645	36 m
25	AF-EVO-5-025	26	27,5	25	7612207514483	40 m
28	AF-EVO-5-028	29	30,5	25	7612207482652	36 m
30	AF-EVO-5-030	31	33	26	7612207501865	32 m
32	AF-EVO-5-032	32	34	26	7612207514506	24 m
35	AF-EVO-5-035	36	38	27	7612207482690	24 m
42	AF-EVO-5-042	43,5	45,5	27	7612207482799	22 m
48	AF-EVO-5-048	49,5	51,5	27,5	7612207482805	16 m

Tube – standard. Black. Tubes packed in cartons.

AF-EVO-5

Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Insulation thickness [mm]	EAN	Content [metric]
54	AF-EVO-5-054	55	57	28,5	7612207482812	16 m
60	AF-EVO-5-060	61,5	63,5	29	7612207482843	12 m
64	AF-EVO-5-064	65	67,5	29	7612207495188	12 m
70	AF-EVO-5-070	71	73,5	29,5	7612207494228	12 m
76	AF-EVO-5-076	77	79,5	30	7612207482850	10 m
89	AF-EVO-5-089	90,5	93	30,5	7612207482867	8 m
108	AF-EVO-5-108	109,5	113	31	7612207482928	6 m
114	AF-EVO-5-114	116	120	31,5	7612207482904	6 m
125	AF-EVO-5-125	127	131	31,5	7612207495195	6 m
140	AF-EVO-5-140	142	146	32	7612207495201	6 m
168	AF-EVO-5-168	170	174	32	7612207495218	4 m

Other information

Thickness tolerance

AF-EVO-1, AF-EVO-2: ± 1.0 mm
 AF-EVO-3, AF-EVO-4: ± 1.5 mm
 AF-EVO-5: ±2.5mm
 AF-EVO-6: ±3.0mm

Length tolerance

± 1.5 %

Tube – standard. Black. Tubes packed in cartons.

AF-EVO-6

Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Insulation thickness [mm]	EAN	Content [metric]
10	AF-EVO-6-010	11	12,5	32	7612207482911	40 m
12	AF-EVO-6-012	13	14,5	32	7612207481563	36 m
15	AF-EVO-6-015	16	17,5	32	7612207481570	32 m
18	AF-EVO-6-018	19	20,5	32	7612207481549	32 m
22	AF-EVO-6-022	23	24,5	33,5	7612207481556	28 m
28	AF-EVO-6-028	29	30,5	35	7612207481662	24 m
35	AF-EVO-6-035	36	38	35	7612207481679	18 m
42	AF-EVO-6-042	43,5	45,5	36,5	7612207481686	16 m
48	AF-EVO-6-048	49,5	51,5	37,5	7612207481693	12 m
54	AF-EVO-6-054	55	57	38	7612207481778	12 m
57	AF-EVO-6-057	58	60	38,5	7612207495225	12 m
60	AF-EVO-6-060	61,5	63,5	39	7612207481785	10 m
64	AF-EVO-6-064	65	67,5	39,5	7612207481891	10 m
70	AF-EVO-6-070	71	73,5	40	7612207481907	8 m
76	AF-EVO-6-076	77	79,5	40,5	7612207481914	8 m
89	AF-EVO-6-089	90,5	93	41,5	7612207482133	6 m
102	AF-EVO-6-102	105	108	42,5	7612207482126	6 m
108	AF-EVO-6-108	109,5	113	42,5	7612207482218	4 m
114	AF-EVO-6-114	116	120	43	7612207482225	4 m
125	AF-EVO-6-125	127	131	44	7612207514490	4 m
133	AF-EVO-6-133	134	139	44	7612207501834	4 m

Tube – standard. Black. Tubes packed in cartons.

AF-EVO-6

Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Insulation thickness [mm]	EAN	Content [metric]
140	AF-EVO-6-140	142	146	44,5	7612207495232	4 m
160	AF-EVO-6-160	162	166	45	7612207492880	4 m
168	AF-EVO-6-168	170	174	45	7612207501858	4 m

Other information

Thickness tolerance
 AF-EVO-1, AF-EVO-2: ± 1.0 mm
 AF-EVO-3, AF-EVO-4: ± 1.5 mm
 AF-EVO-5: ±2.5mm
 AF-EVO-6: ±3.0mm

Length tolerance
 ± 1.5 %

Tube – self-seal. Black

AF-EVO-1

Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Insulation thickness [mm]	EAN	Content [metric]
12	AF-EVO-1-012-A	12	14,5	7,5	7612207480672	234 m
15	AF-EVO-1-015-A	16	17,5	8	7612207480580	192 m
18	AF-EVO-1-018-A	19	20,5	8	7612207480535	140 m
22	AF-EVO-1-022-A	23	24,5	8,5	7612207480849	132 m
28	AF-EVO-1-028-A	29	30,5	8,5	7612207480696	100 m
30	AF-EVO-1-030-A	31	33	9	7612207480733	96 m
35	AF-EVO-1-035-A	36	38	9	7612207480962	76 m
42	AF-EVO-1-042-A	43,5	45,5	9	7612207480993	60 m
48	AF-EVO-1-048-A	49,5	51,5	9	7612207481037	50 m
54	AF-EVO-1-054-A	55	57	9	7612207495270	48 m
60	AF-EVO-1-060-A	61,5	63,5	9	7612207481082	36 m
76	AF-EVO-1-076-A	77	79,5	9,5	7612207480757	28 m
89	AF-EVO-1-089-A	90,5	93,5	9,5	7612207480818	22 m

Other information

Thickness tolerance
 AF-EVO-1, AF-EVO-2: ±1.0 mm
 AF-EVO-3, AF-EVO-4: ±1.5 mm

Length tolerance
 ± 1.5 %

Tube – self-seal. Black

AF-EVO-2

Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Insulation thickness [mm]	EAN	Content [metric]
12	AF-EVO-2-012-A	12	14,5	11	7612207480771	168 m
15	AF-EVO-2-015-A	16	17,5	11,5	7612207481051	130 m
18	AF-EVO-2-018-A	19	20,5	11,5	7612207481341	120 m
22	AF-EVO-2-022-A	23	24,5	12	7612207481402	100 m
28	AF-EVO-2-028-A	29	30,5	12,5	7612207481358	84 m
30	AF-EVO-2-030-A	31	33	12,5	7612207481372	72 m
35	AF-EVO-2-035-A	36	38	13	7612207481419	62 m
42	AF-EVO-2-042-A	43,5	45,5	13,5	7612207481457	48 m

Tube – self-seal. Black

AF-EVO-2

Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Insulation thickness [mm]	EAN	Content [metric]
48	AF-EVO-2-048-A	49,5	51,5	13,5	7612207481501	44 m
54	AF-EVO-2-054-A	55	57	13,5	7612207482317	36 m
60	AF-EVO-2-060-A	61,5	63,5	14	7612207482447	32 m
64	AF-EVO-2-064-A	65	67,5	14	7612207481822	30 m
70	AF-EVO-2-070-A	71	73,5	14	7612207481969	28 m
76	AF-EVO-2-076-A	77	79,5	14	7612207481983	28 m
89	AF-EVO-2-089-A	90,5	93,5	14,5	7612207482089	22 m

Other information

Thickness tolerance AF-EVO-1, AF-EVO-2: ±1.0 mm
AF-EVO-3, AF-EVO-4: ±1.5 mm

Length tolerance ± 1.5 %

Tube – self-seal. Black

AF-EVO-3

Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Insulation thickness [mm]	EAN	Content [metric]
15	AF-EVO-3-015-A	16	17,5	13,5	7612207482379	108 m
18	AF-EVO-3-018-A	19	20,5	14	7612207482478	96 m
22	AF-EVO-3-022-A	23	24,5	14,5	7612207482492	84 m
28	AF-EVO-3-028-A	29	30,5	15,5	7612207482539	64 m
35	AF-EVO-3-035-A	36	38	16	7612207482553	46 m
42	AF-EVO-3-042-A	43,5	45,5	16,5	7612207482614	40 m
48	AF-EVO-3-048-A	49,5	51,5	16,5	7612207482669	32 m
54	AF-EVO-3-054-A	55	57	17	7612207482683	28 m
60	AF-EVO-3-060-A	61,5	63,5	17,5	7612207482713	24 m
76	AF-EVO-3-076-A	77	79,5	17,5	7612207482737	16 m
89	AF-EVO-3-089-A	90,5	93,5	17,5	7612207482751	16 m

Other information

Thickness tolerance AF-EVO-1, AF-EVO-2: ±1.0 mm
AF-EVO-3, AF-EVO-4: ±1.5 mm

Length tolerance ± 1.5 %

Tube – self-seal. Black

AF-EVO-4

Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Insulation thickness [mm]	EAN	Content [metric]
15	AF-EVO-4-015-A	16	17,5	17	7612207481624	88 m
18	AF-EVO-4-018-A	19	20,5	17,5	7612207481648	70 m
22	AF-EVO-4-022-A	23	24,5	18	7612207481723	60 m
28	AF-EVO-4-028-A	29	30,5	19	7612207481754	48 m
35	AF-EVO-4-035-A	36	38	19,5	7612207481853	36 m
42	AF-EVO-4-042-A	43,5	45,5	20,5	7612207481877	32 m
48	AF-EVO-4-048-A	49,5	51,5	21	7612207482003	24 m

Tube – self-seal. Black

AF-EVO-4

Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Insulation thickness [mm]	EAN	Content [metric]
54	AF-EVO-4-054-A	55	57	21	7612207482027	24 m
60	AF-EVO-4-060-A	61,5	63,5	21,5	7612207482041	20 m
64	AF-EVO-4-064-A	65	67,5	21,5	7612207482119	18 m
70	AF-EVO-4-070-A	70	73,5	22	7612207482195	16 m
76	AF-EVO-4-076-A	77	79,5	22	7612207482263	16 m
89	AF-EVO-4-089-A	90,5	93,5	22,5	7612207482393	12 m

Other information

Thickness tolerance AF-EVO-1, AF-EVO-2: ±1.0 mm
AF-EVO-3, AF-EVO-4: ±1.5 mm

Length tolerance ± 1.5 %

Coil. Black

AF-EVO-1

Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Insulation thickness [mm]	EAN	Content [metric]
6	AF-EVO-1-006/E	7	8,5	7	7612207480603	90 m
8	AF-EVO-1-008/E	9	10,5	7	7612207480627	80 m
10	AF-EVO-1-010/E	11	12,5	7,5	7612207480641	60 m
12	AF-EVO-1-012/E	13	14,5	7,5	7612207480665	50 m
15	AF-EVO-1-015/E	16	17,5	8	7612207480573	40 m
18	AF-EVO-1-018/E	19	20,5	8	7612207480528	35 m
22	AF-EVO-1-022/E	23	24,5	8,5	7612207480559	30 m
28	AF-EVO-1-028/E	29	30,5	8,5	7612207480689	28 m

Other information

Thickness tolerance ≤6mm: ±1.0mm
7 - 19mm: ±1,5mm

Length tolerance ± 1.5%

Coil. Black

AF-EVO-2

Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Insulation thickness [mm]	EAN	Content [metric]
6	AF-EVO-2-006/E	7	8,5	9,5	7612207480917	60 m
8	AF-EVO-2-008/E	9	10,5	10	7612207480931	55 m
10	AF-EVO-2-010/E	11	12,5	11	7612207480955	35 m
12	AF-EVO-2-012/E	13	14,5	11	7612207481020	32 m
15	AF-EVO-2-015/E	16	17,5	11,5	7612207480795	32 m
18	AF-EVO-2-018/E	19	20,5	11,5	7612207481495	30 m
22	AF-EVO-2-022/E	23	24,5	12	7612207481396	26 m
28	AF-EVO-2-028/E	29	30,5	12,5	7612207481518	20 m

Other information

Thickness tolerance ≤6mm: ±1.0mm
7 - 19mm: ±1,5mm

Coil. Black

AF-EVO-2

Pipe Ø [mm]	Item	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Insulation thickness [mm]	EAN	Content [metric]
Length tolerance		± 1.5%				

Sheet – standard. Black

Item	Insulation thickness [mm]	Width [mm]	Length [m]	EAN	Content [metric]
AF-EVO-10MM	10	500	2	7612207482430	13 m ²
AF-EVO-13MM	13	500	2	7612207481815	9 m ²
AF-EVO-16MM	16	500	2	7612207482140	8 m ²
AF-EVO-19MM	19	500	2	7612207481327	7 m ²
AF-EVO-25MM	25	500	2	7612207481259	5 m ²
AF-EVO-32MM	32	500	2	7612207481174	4 m ²
AF-EVO-50MM	50	500	2	7612207494068	3 m ²

Other information

Thickness tolerance	7 -19 mm: ±1.5 mm >19 mm: ±2.0 mm
Length tolerance	± 1.5 %
Remarks	One 1m ² sheet can be replaced by two pieces of 0.5 m ² sheet.

Sheet – self-adhesive. Black

Item	Insulation thickness [mm]	Width [mm]	Length [m]	EAN	Content [metric]
AF-EVO-10MM/A	10	500	2	7612207481587	13 m ²
AF-EVO-13MM/A	13	500	2	7612207481921	9 m ²
AF-EVO-19MM/A	19	500	2	7612207481334	7 m ²
AF-EVO-25MM/A	25	500	2	7612207481266	5 m ²
AF-EVO-32MM/A	32	500	2	7612207481181	4 m ²

Other information

Thickness tolerance	7 -19 mm: ±1.5 mm >19 mm: ±2.0 mm
Length tolerance	± 1.5 %
Remarks	One 1m ² sheet can be replaced by two pieces of 0.5 m ² sheet.

Black

Item	Insulation thickness [mm]	Width [mm]	Length [m]	EAN	Content [metric]
AF-EVO-03MM/E	3	1.000	30	7612207482836	30 m ²
AF-EVO-06MM/E	6	1.000	15	7612207482294	15 m ²
AF-EVO-10MM/E	10	1.000	10	7612207481594	10 m ²
AF-EVO-13MM/E	13	1.000	8	7612207481938	8 m ²
AF-EVO-16MM/E	16	1.000	7	7612207482157	7 m ²
AF-EVO-19MM/E	19	1.000	5	7612207528275	5 m ²
AF-EVO-25MM/E	25	1.000	4	7612207481273	4 m ²
AF-EVO-32MM/E	32	1.000	3	7612207481198	3 m ²
AF-EVO-50MM/E	50	1.000	5	7612207494051	5 m ²

Other information

Black

Item	Insulation thickness [mm]	Width [mm]	Length [m]	EAN	Content [metric]
Thickness tolerance		3mm: ±1.5mm 6mm: ±1.0mm 7 - 19mm: ±1.5mm >19mm: ±2.0mm			
Length tolerance		±1.5%			

Roll - standard self-adhesive. Black

Item	Insulation thickness [mm]	Width [mm]	Length [m]	EAN	Content [metric]
AF-EVO-03MM/EA	3	1.000	30	7612207482874	30 m ²
AF-EVO-06MM/EA	6	1.000	15	7612207482287	15 m ²
AF-EVO-10MM/EA	10	1.000	10	7612207481709	10 m ²
AF-EVO-13MM/EA	13	1.000	8	7612207481945	8 m ²
AF-EVO-16MM/EA	16	1.000	7	7612207481303	7 m ²
AF-EVO-19MM/EA	19	1.000	5	7612207528268	5 m ²
AF-EVO-25MM/EA	25	1.000	4	7612207481280	4 m ²
AF-EVO-32MM/EA	32	1.000	3	7612207481204	3 m ²

Other information

Thickness tolerance		3mm: ±1.5mm 6mm: ±1.0mm 7 - 19mm: ±1.5mm >19mm: ±2.0mm			
Length tolerance		±1.5%			

Tape – insulation. Black

Item	Thickness [mm]	Width [mm]	Length [m]	Content [quantity]
AF-EVO-TAPE-MC	3	50	15	12 roll
AF-EVO-TAPE-MC/6	3	50	15	6 roll

Strips - self-adhesive. Black

Item	Thickness [mm]	Width [mm]	Length [m]	Content [quantity]
AF-EVO-10MM/E-S50	10	50	10	20 roll
AF-EVO-10MM/E-S100	10	100	10	10 roll
AF-EVO-13MM/E-S50	13	50	8	20 roll
AF-EVO-13MM/E-S100	13	100	8	10 roll
AF-EVO-19MM/E-S50	19	50	6	20 roll
AF-EVO-19MM/E-S75	19	75	6	13 roll
AF-EVO-19MM/E-S100	19	100	6	10 roll

Bend – 90°, application angle W (welded). Black. Prefabricated elbow covering with insulation

AF-EVO-2						AF-EVO-4					
Pipe Ø [mm]	Item	Description	Thickness [mm]	EAN	Content [quantity]	Pipe Ø [mm]	Item	Description	Thickness [mm]	EAN	Content [quantity]
15	AF-EVO-2-015-C90	3 segments	11,5	7612207529319	1 piece	15	AF-EVO-4-015-C90	3 segments	17	7612207529814	1 piece
18	AF-EVO-2-018-C90	3 segments	11,5	7612207529616	1 piece	18	AF-EVO-4-018-C90	3 segments	17,5	7612207529821	1 piece

Bend – 90°, application angle W (welded). Black. Prefabricated elbow covering with insulation

AF-EVO-2						AF-EVO-4					
Pipe Ø [mm]	Item	Description	Thickness [mm]	EAN	Content [quantity]	Pipe Ø [mm]	Item	Description	Thickness [mm]	EAN	Content [quantity]
22	AF-EVO-2-022-C90	3 segments	12	76122075299 68	1 piece	22	AF-EVO-4-022-C90	3 segments	18	76122075297 60	1 piece
28	AF-EVO-2-028-C90	3 segments	12,5	76122075301 55	1 piece	28	AF-EVO-4-028-C90	3 segments	19	76122075293 26	1 piece
35	AF-EVO-2-035-C90	3 segments	13	76122075295 31	1 piece	35	AF-EVO-4-035-C90	3 segments	19,5	76122075293 95	1 piece
42	AF-EVO-2-042-C90	3 segments	13,5	76122075301 62	1 piece	42	AF-EVO-4-042-C90	3 segments	20,5	76122075297 77	1 piece
48	AF-EVO-2-048-C90	3 segments	13,5	76122075295 48	1 piece	48	AF-EVO-4-048-C90	3 segments	21	76122075299 13	1 piece
54	AF-EVO-2-054-C90	3 segments	13,5	76122075299 99	1 piece	54	AF-EVO-4-054-C90	3 segments	21	76122075302 23	1 piece
60	AF-EVO-2-060-C90	3 segments	14	76122075295 55	1 piece	60	AF-EVO-4-060-C90	3 segments	21,5	76122075294 49	1 piece
64	AF-EVO-2-064-C90	3 segments	14	76122075299 06	1 piece	64	AF-EVO-4-064-C90	3 segments	21,5	76122075294 56	1 piece
76	AF-EVO-2-076-C90	3 segments	14	76122075301 79	1 piece	76	AF-EVO-4-076-C90	3 segments	22	76122075298 38	1 piece
89	AF-EVO-2-089-C90	3 segments	14,5	76122075301 86	1 piece	89	AF-EVO-4-089-C90	3 segments	22,5	76122075295 79	1 piece
114	AF-EVO-2-114-C90	3 segments	15	76122075297 53	1 piece	114	AF-EVO-4-114-C90	3 segments	23,5	76122075297 84	1 piece
-	-	-	-	-	-	168	AF-EVO-4-168-C90	3 segments	25	76122075297 22	1 piece

Other information

Thickness tolerance

AF-EVO-1, AF-EVO-2: ± 1.0 mm
 AF-EVO-3, AF-EVO-4: ± 1.5 mm
 AF-EVO-5: ±2.5mm
 AF-EVO-6: ±3.0mm

Remarks

Other items can be produced upon request

Bend – 90°, application angle W (welded). Black. Prefabricated elbow covering with insulation

AF-EVO-5						AF-EVO-6					
Pipe Ø [mm]	Item	Description	Thickness [mm]	EAN	Content [quantity]	Pipe Ø [mm]	Item	Description	Thickness [mm]	EAN	Content [quantity]
18	AF-EVO-5-018-C90	3 segments	25	76122075299 75	1 piece	18	AF-EVO-6-018-C90	3 segments	32	76122075295 17	1 piece
22	AF-EVO-5-022-C90	3 segments	25	76122075292 96	1 piece	22	AF-EVO-6-022-C90	3 segments	33,5	76122075295 24	1 piece
28	AF-EVO-5-028-C90	3 segments	25	76122075300 25	1 piece	28	AF-EVO-6-028-C90	3 segments	35	76122075301 17	1 piece
35	AF-EVO-5-035-C90	3 segments	27	76122075300 32	1 piece	35	AF-EVO-6-035-C90	3 segments	35	76122075298 76	1 piece

Bend – 90°, application angle W (welded). Black. Prefabricated elbow covering with insulation

AF-EVO-5						AF-EVO-6					
Pipe Ø [mm]	Item	Description	Thickness [mm]	EAN	Content [quantity]	Pipe Ø [mm]	Item	Description	Thickness [mm]	EAN	Content [quantity]
42	AF-EVO-5-042-C90	3 segments	27	7612207529623	1 piece	42	AF-EVO-6-042-C90	3 segments	36,5	7612207529586	1 piece
48	AF-EVO-5-048-C90	3 segments	27,5	7612207529302	1 piece	48	AF-EVO-6-048-C90	3 segments	37,5	7612207530124	1 piece
54	AF-EVO-5-054-C90	3 segments	28,5	7612207529463	1 piece	54	AF-EVO-6-054-C90	3 segments	38	7612207530131	1 piece
60	AF-EVO-5-060-C90	3 segments	29	7612207529630	3 piece	60	AF-EVO-6-060-C90	3 segments	39	7612207529791	1 piece
64	AF-EVO-5-064-C90	3 segments	29	7612207529982	1 piece	64	AF-EVO-6-064-C90	3 segments	39,5	7612207529739	1 piece
76	AF-EVO-5-076-C90	3 segments	30	7612207529470	1 piece	76	AF-EVO-6-076-C90	3 segments	40,5	7612207529937	1 piece
89	AF-EVO-5-089-C90	3 segments	30,5	7612207529869	1 piece	89	AF-EVO-6-089-C90	3 segments	41,5	7612207529487	1 piece
114	AF-EVO-5-114-C90	3 segments	31,5	7612207529920	1 piece	140	AF-EVO-6-140-C90	3 segments	44	7612207530148	1 piece
-	-	-	-	-	-	168	AF-EVO-6-168-C90	3 segments	45	7612207529883	1 piece

Other information

Thickness tolerance

AF-EVO-1, AF-EVO-2: ± 1.0 mm
 AF-EVO-3, AF-EVO-4: ± 1.5 mm
 AF-EVO-5: ±2.5mm
 AF-EVO-6: ±3.0mm

Remarks

Other items can be produced upon request

Prefabricated part – t-piece. Black

AF-EVO-2						AF-EVO-4					
Pipe Ø [mm]	Item	Description	Thickness [mm]	EAN	Content [quantity]	Pipe Ø [mm]	Item	Description	Thickness [mm]	EAN	Content [quantity]
15	AF-EVO-2-015-T90	2 segments	11,5	7612207529647	1 piece	15	AF-EVO-4-015-T90	2 segments	17	7612207529890	1 piece
18	AF-EVO-2-018-T90	2 segments	11,5	7612207530049	1 piece	18	AF-EVO-4-018-T90	2 segments	17,5	7612207529685	1 piece
22	AF-EVO-2-022-T90	2 segments	12	7612207530056	1 piece	22	AF-EVO-4-022-T90	2 segments	18	7612207530001	1 piece
28	AF-EVO-2-028-T90	2 segments	12,5	7612207530063	1 piece	28	AF-EVO-4-028-T90	2 segments	19	7612207529494	1 piece
35	AF-EVO-2-035-T90	2 segments	13	7612207529654	1 piece	35	AF-EVO-4-035-T90	2 segments	19,5	7612207529593	1 piece
42	AF-EVO-2-042-T90	2 segments	13,5	7612207529661	1 piece	42	AF-EVO-4-042-T90	2 segments	20	7612207530018	1 piece
48	AF-EVO-2-048-T90	2 segments	13,5	7612207530070	1 piece	48	AF-EVO-4-048-T90	2 segments	21	7612207529609	1 piece

Prefabricated part – t-piece. Black

AF-EVO-2						AF-EVO-4					
Pipe Ø [mm]	Item	Description	Thickness [mm]	EAN	Content [quantity]	Pipe Ø [mm]	Item	Description	Thickness [mm]	EAN	Content [quantity]
54	AF-EVO-2-054-T90	2 segments	13,5	7612207530087	1 piece	54	AF-EVO-4-054-T90	2 segments	21	7612207529401	1 piece
60	AF-EVO-2-060-T90	2 segments	14	7612207531350	1 piece	60	AF-EVO-4-060-T90	2 segments	21,5	7612207530193	1 piece
64	AF-EVO-2-064-T90	2 segments	14	7612207529678	1 piece	64	AF-EVO-4-064-T90	2 segments	21,5	7612207529418	1 piece
76	AF-EVO-2-076-T90	2 segments	14	7612207530094	1 piece	76	AF-EVO-4-076-T90	2 segments	22	7612207529845	1 piece
89	AF-EVO-2-089-T90	2 segments	14,5	7612207530100	1 piece	89	AF-EVO-4-089-T90	2 segments	22,5	7612207529425	1 piece

Prefabricated part – t-piece. Black

AF-EVO-5						AF-EVO-6					
Pipe Ø [mm]	Item	Description	Thickness [mm]	EAN	Content [quantity]	Pipe Ø [mm]	Item	Description	Thickness [mm]	EAN	Content [quantity]
18	AF-EVO-5-018-T90	2 segments	25	7612207529852	1 piece	18	AF-EVO-6-018-T90	2 segments	32	7612207529357	1 piece
22	AF-EVO-5-022-T90	2 segments	25	7612207531374	1 piece	22	AF-EVO-6-022-T90	2 segments	33,5	7612207531411	1 piece
28	AF-EVO-5-028-T90	2 segments	25	7612207529432	1 piece	28	AF-EVO-6-028-T90	2 segments	35	7612207531381	1 piece
35	AF-EVO-5-035-T90	2 segments	27	7612207529333	1 piece	35	AF-EVO-6-035-T90	2 segments	35	7612207529364	1 piece
42	AF-EVO-5-042-T90	2 segments	27	7612207530209	1 piece	42	AF-EVO-6-042-T90	2 segments	36,5	7612207531428	1 piece
48	AF-EVO-5-048-T90	2 segments	27,5	7612207529388	1 piece	48	AF-EVO-6-048-T90	2 segments	37,5	7612207531343	1 piece
54	AF-EVO-5-054-T90	2 segments	28,5	7612207529692	1 piece	54	AF-EVO-6-054-T90	2 segments	38	7612207531367	1 piece
60	AF-EVO-5-060-T90	2 segments	29	7612207529340	1 piece	60	AF-EVO-6-060-T90	2 segments	39	7612207531398	1 piece
64	AF-EVO-5-064-T90	2 segments	29	7612207529708	1 piece	64	AF-EVO-6-064-T90	2 segments	39,5	7612207529371	1 piece
76	AF-EVO-5-076-T90	2 segments	30	7612207529715	1 piece	76	AF-EVO-6-076-T90	2 segments	40,5	7612207531404	1 piece
89	AF-EVO-5-089-T90	2 segments	30,5	7612207530216	1 piece	89	AF-EVO-6-089-T90	2 segments	41,5	7612207529500	1 piece
-	-	-	-	-	-	114	AF-EVO-6-114-T90	2 segments	43	7612207529746	1 piece
-	-	-	-	-	-	140	AF-EVO-6-140-T90	2 segments	44	7612207529951	1 piece

Adhesives and Cleaners

Item	Description	Content [quantity]
ADH-525/0,25	0,25 litre tins packed in a carton.	40 tin
ADH-525/0,5	0,5 litre tins packed in a carton.	12 tin
ADH-525/1,0	1.0 litre tins packed in a carton.	12 tin
ADH-525/2,5	2.5 litre tins packed in a carton.	8 tin
CLEANER/1,0	Special cleaner for use with ArmaFlex adhesives	4 tin