




CLEANER INDOOR AIR QUALITY  
FOR OPERATIONAL RELIABILITY

# ArmaFlex<sup>®</sup> Pro

The preferred dust- and fibre-free insulation  
for cleaner indoor air quality and reliable  
condensation control

- // Fibre-free insulation for cleaner indoor air quality - an important criteria in mission-critical environments where dust cannot be tolerated
- // Reliable condensation control performance in facilities that operate continuously, such as data centres, server rooms and hospitals
- // Meets criteria of Singapore Civil Defence Force for construction material containing plastic for wall and ceiling material / finishes
- // Active antimicrobial protection for reliable resistance against mould and bacteria

[www.armacell.com.sg](http://www.armacell.com.sg)

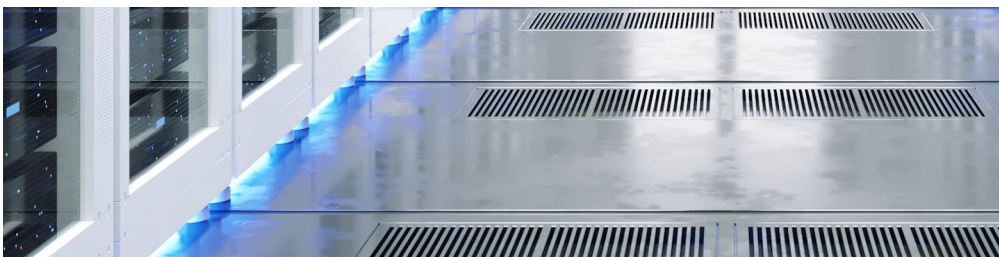

 **armacell**<sup>®</sup>  
ArmaFlex<sup>®</sup>

## TECHNICAL DATA - ARMAFLEX PRO

Brief description	Highly-flexible, closed-cell insulation material with high water vapour diffusion resistance and low thermal conductivity. ArmaFlex Pro also meets the Singapore Fire Code requirement for wall and ceiling material/finishes.
Material type	Elastomeric foam based on synthetic rubber (nitrile butadiene), with reinforced aluminum foil facing.
Colour	Black foam with silver facing.
Special features	Smooth surface with bright silver finish.
Product range	Sheets with 13mm, 19mm and 25mm insulation thickness.
Applications	Installed in data centres and rooms that operate 24 hours daily to prevent condensation and enable energy efficiency through insulation.
Installation	Both the concrete surface and the insulation material should be clean and dry for optimal adhesion. If required, wipe both surfaces with a solvent to ensure an oil-free surface. Care should be taken that the cement surface does not soak up too much adhesive as the surface could dry too quickly and lose its adhesiveness. Application of a bitumen-free prime coat is advised. Install ArmaFlex insulation material according to the recommendations detailed in the latest ArmaFlex application manual. This installation advice also applies to application of ArmaFlex on masonry.

Property	Value/Assessment			Standard/Test method	
<b>Temperature range</b>					
Service temperature	Range	Minimum [°C]	Maximum [°C]		
	Full range	-50	+85		
	Remarks	Contact Armacell for applications beyond recommended service temperature range.			
<b>Thermal conductivity</b>					
Declared thermal conductivity	$\theta_m$	0 °C	+23 °C	+40 °C	ASTM C518
	$\lambda_d \leq [W/(m \cdot K)]$	0.034	0.036	0.039	
<b>Resistance to water vapour</b>					
Water vapour diffusion resistance factor	$\mu \geq 10,000$			EN 12086	
<b>Fire performance</b>					
Surface spread of flame	Class 1			BS 476 Part 7	
Fire propagation for products	Class 0			BS 476 Part 6	
Smoke generation and toxicity	CIT < 0.75			EN 45545-2	
	VOF <sub>d</sub> < 300 min				ISO 5659-2

All data and technical information are based on results achieved under typical application conditions. Recipients of this information should, in their own interest and responsibility, clarify with our Technical department in due time whether or not the data and information apply to the intended application area..

### Sheet – precovered

Insulation thickness [mm]	1.20m width			
	Item	Length [m]	Carton content [pcs]	Carton content [sqm]
13	ARO-13120/AL	2.00	22	52.8
19	ARO-19120/AL	2.00	16	38.4
25	ARO-25120/AL	2.00	12	28.8

### Sheet – precovered self-adhesive

Insulation thickness [mm]	1.20m width			
	Item	Length [m]	Carton content [pcs]	Carton content [sqm]
13	ARO-13120/A-AL	2.0	22	52.8
19	ARO-19120/A-AL	2.00	16	38.4
25	ARO-25120/A-AL	2.00	12	28.8

All data and technical information are based on results achieved under the specific conditions defined according to the testing standards referenced. Despite taking every precaution to ensure that said data and technical information are up to date, Armacell does not make any representation or warranty, express or implied, as to the accuracy, content or completeness of said data and technical information. Armacell also does not assume any liability towards any person resulting from the use of said data or technical information. Armacell reserves the right to revoke, modify or amend this document at any moment. It is the customer's responsibility to verify if the product is suitable for the intended application. The responsibility for professional and correct installation and compliance with relevant building regulations lies with the customer. This document does not constitute nor is part of a legal offer or contract. By ordering/receiving product you accept the Armacell General Terms and Conditions of Sale applicable in the region.

At Armacell, your trust means everything to us, so we want to let you know your rights and make it easier for you to understand what information we collect and why we collect it. If you would like to find out about our processing of data, please visit our Data Protection Policy.

© Armacell, 2021. All rights reserved. Trademarks followed by ® or ™ are trademarks of the Armacell Group.

00455 | ArmaFlex Pro | ArmaFlex | ProductDS | 032021 | en-SG

## ABOUT ARMACELL

---

As the inventors of flexible foam for equipment insulation and a leading provider of engineered foams, Armacell develops innovative and safe thermal, acoustic and mechanical solutions that create sustainable value for its customers. Armacell's products significantly contribute to global energy efficiency making a difference around the world every day. With 3,000 employees and 23 production plants in 15 countries, the company operates two main businesses, Advanced Insulation and Engineered Foams. Armacell focuses on insulation materials for technical equipment, high-performance foams for high-tech and lightweight applications and next generation aerogel blanket technology. For more information, please visit: [www.armacell.com](http://www.armacell.com).



For more information, please visit:  
[www.armacell.com](http://www.armacell.com)